

# DEMA MODEL 68-4

## FISHER, CHICAGO, AND T & S FAUCET ADAPTER KIT

### 1. PARTS:

**Model: 68-4**

- A. (1) 6' Long Hose - Male Garden Hose x Plain End. P/N 44-3-6LFC
- B. (1) Manifold Assy. P/N 68-4-6
- C. (1) Rubber Washer. P/N 150-6
- D. (1) Hose Clamp. P/N 76-2-2
- E. (2 ea.) Fisher, Chicago, T&S Faucet Adapters.
- F. (1) Rubber Washer, Chicago adapters.\*\*\* P/N 150-7

		<b>Model: 68-4-1A</b> Contains Items A. thru D.
<b>Model: 68-4-2</b> Contains Items A. thru D. and (2 ea.) Fisher Adapters	<b>Model: 68-4-3</b> Contains Items A, B, D, and F (2 ea.) Chicago Adapters	<b>Model: 68-4-4</b> Contains Items A. thru D. and (2 ea.) T&S Adapters
<b>Model: 68-4-2A</b> Contains Item C and (2 ea.) Fisher Adapters	<b>Model: 68-4-3A</b> Contains Item F and (2 ea.) Chicago Adapters	<b>Model: 68-4-4A (regular)</b> <b>Model: 68-4-7A (large*)</b> Contains Item C and (2 ea.) T&S Adapters
<b>Model: 68-4JG</b> Contains Items B (68-4-6JG), C, D, E, and F		


\* 68-4-7 and 68-4-7A are for the large institutional size sinks that the regular T&S faucets will not fit.  
 \*\*\*150-7 is to only be used with Chicago style adapters.

### 2. INSTALLATION:

Remove the spout from the faucet and tighten the manifold assembly onto the faucet using a rubber sealing washer. Next, attach the spout to the top of the manifold assembly and push the hose and clamp onto the male hose barb. Tighten the hose clamp and attach the other end of the hose to the blend center.

**NOTE:** Do not remove the o-ring from under the sink spout.

# DEMA MODEL 68-4 FISHER, CHICAGO, AND T & S FAUCET ADAPTER KIT

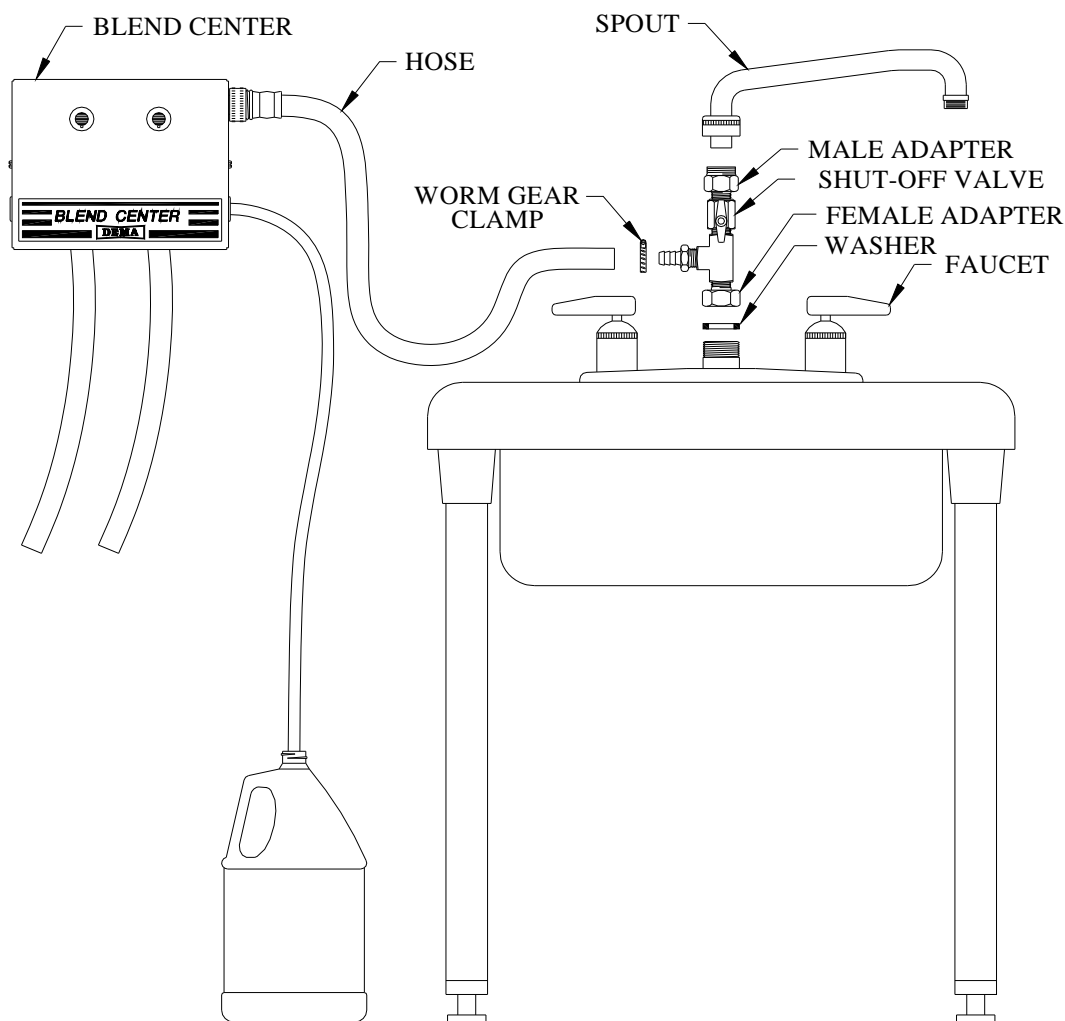

**RETURNS: NO MERCHANDISE MAY BE RETURNED FOR CREDIT WITHOUT DEMA'S WRITTEN PERMISSION. RETURN MERCHANDISE AUTHORIZATION NUMBER REQUIRED IN ADVANCE OF RETURN.**

## **WARRANTY:**

DEMA products are warranted against defective material and workmanship under normal use and service for one year from the date of manufacture. This limited warranty does not apply to any products which have a normal life shorter than one year or failure and damage caused by chemicals, corrosion, improper voltage supply, physical abuse, or misapplication. Rubber and synthetic rubber parts such as "O"-rings, diaphragms, squeeze tubing and gaskets are considered expendable and are not covered under warranty. This warranty is extended only to the original buyer of DEMA products. If products are altered or repaired without prior approval of DEMA, this warranty will be void.

Defective units or parts should be returned to the factory with transportation prepaid. If inspection shows them to be defective, they will be repaired or replaced without charge, F.O.B. factory. DEMA assumes no liability for damages. Return merchandise authorization number, to return units for repair or replacement, must be granted in advance of return.